

## BETA Series Semi-Absolute filters

### TLR - TKR - TNR

Product	TLR	TKR	TNR
MPPS efficiency*	≥ 85	≥ 85	≥ 85
CEN EN1822 classification	H 10	H 10	H 10
Eff. DOP test UNI 7833	> 95 %	> 95 %	> 95 %
Suggested final pressure drop	600 Pa	600 Pa	600 Pa
Maximum pressure drop	1000 Pa	1000 Pa	1000 Pa
Maximum operating temperature	90°C	100°C	60°C
Maximum relative humidity	90 %	100 %	100 %

\* Average efficiency.

TLR - TKR - TNR Delta semi-absolute filters offer very high filtration efficiency and low pressure drops, hence they allow for limited energy consumption levels in the systems. The TLR and TKR filter medium is made of pleated glass micro-fiber paper fitted with corrugated aluminum spacers; it is fixed to the frame through an elastomeric sealant. TLR filters have an MDF wood frame, whereas TKR filters have a galvanized steel frame. NR filters differ from the previous because they are multi-diehdral; the glass fiber medium is mini-pleated with continuous thermal plastic spacers and the frame is made of galvanized steel. All the models have high dust holding capacity and offer considerable mechanical resistance.

#### Applications :

TLR - TKR - TNR filters are used in all civil, industrial and processing facilities which require high air cleanness levels, but not so high as to need absolute filters. Luxury residential rooms, food, chemical, pharmaceutical, photographic, mass consumption electronic, precise mechanical applications, etc., are just a few examples of the typical use of these filters. Furthermore, they are also used in libraries, museums, art galleries, gold-working laboratories and in several other prestigious and precise industrial and craftsmanship industries.


#### Installation :

TLR - TKR - TNR filters need to fitted with pre-filters to maintain high operating life levels. They can be installed


Type	Dimensions (mm)			Nominal air rate flow m <sup>3</sup> /h	Filtration media m <sup>2</sup>	Initial pressure drop Pa			
	A	B	C						
TLR - TKR									
3	305	x	305	x	149	400	111	2	130
42	305	x	610	x	149	800	222	4	130
4	610	x	610	x	149	1700	472	8	130
31	305	x	305	x	292	800	222	4	200
52	305	x	610	x	292	1700	472	8	200
54	595	x	595	x	292	3200	889	16	200
5	610	x	610	x	292	3400	944	17	200
6	610	x	762	x	292	4000	1111	21	200
NR									
52	305	x	610	x	292	4000	556	18	170
5	610	x	610	x	292	2000	1111	38	170
6	610	x	762	x	292	5000	1389	47	170

\*1 m<sup>3</sup>/s x 10<sup>-3</sup> = 1 l/s

#### Size

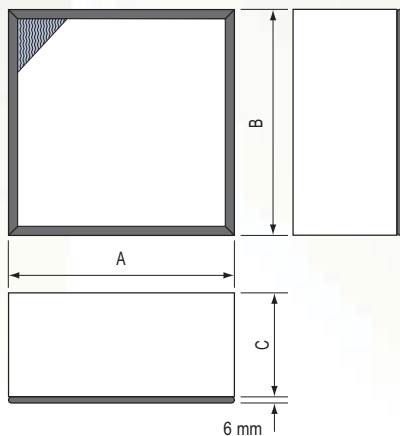

#### Typical curves

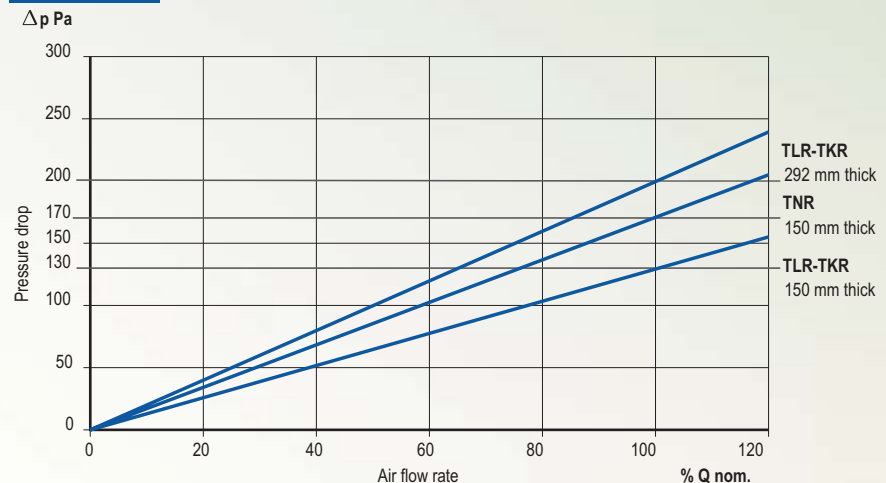

# Technomart

Kamrabad, Fullorhat (Near Fullorhat Yuba Sangha), Sonarpur, Kolkata - 700 150, W.B., India  
 Tel : +91 9830156166 / 9230556166 / 9230518809 Fax : +91 33 2434 6692  
 e-mail : technomart@vsnl.net, Web : www.techno-filter.com