


CARBOFILT cartridge activated carbon cells

TM-CAB

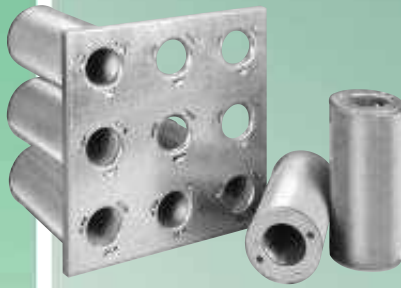

Prodotto	TM - CAB
Maximum air flow rate	110% of nominal
Maximum operating temperature	60 Deg. C
Maximum relative humidity	60 %
Applications: odors, steam and organic solvents	Carbon type 2.0
Application: acid gas, H₂S, SO₂ etc.	Carbon type 2.1

CAB model cartridge activated carbon filters remove the bad odors generally present in civil facilities and the vapors produced by industrial processes. They are made of a galvanized steel sheet cartridge and micro-drawn grids containing vegetable activated carbon installed in a galvanized sheet frame. The air containing odors and gas passes through the activated carbons inside the cylinders and comes out purified and odorless. Before passing through activated carbons, the air must be properly filtered to remove all the dust and the particles that could clog the carbons. CAB filters have average activated carbon quantities and are suitable for average

odor concentration levels. They have a low pressure drop and this reduces fan energy consumption levels. The activated carbons can be regenerated by using vapor.

Applications

CAB carbon activated filters are recommended for most of the conditioning and ventilation units in civil facilities, to improve the quality of the air. They contribute to the reduction of external ventilation air flow, hence they significantly limit energy consumption levels. They are used in air treatment plants, in top roof conditioning units and in ventilation units, downstream of high efficiency pre-filters which protect them from dust build-up.


Installation

As for all other types of filters during installation it is very important to avoid any air by-pass around the activated carbon filter. CAB filters can also be used in duct housing in Multimod elements. The installation position of the filter can be either horizontal or vertical. To establish the end of the operating life of the filter (saturation of carbons), you need to foresee connections both upstream and downstream of the filter for olfactory evaluations of the air.

Code	Carbon type	Sizes (mm)			Nominal air flow		Initial pressure drop Pa	Carbon cont. kg
		A	B	C	m ³ /h	m ³ /s x 10 ^{-3*}		
12 / 2.0	P 2.0	600	x 300	x 300	700	194	200	7,5
2 / 2.0	P 2.0	600	x 600	x 300	1800	500	200	22,5
32 / 2.0	P 2.0	600	x 300	x 400	1000	278	200	10,5
4 / 2.0	P 2.0	600	x 600	x 400	2700	750	200	31,5
5 / 2.0	P 2.0	800	x 800	x 400	4500	1250	200	56
6 / 2.0	P 2.0	800	x 400	x 400	2250	625	200	28

*1 m³/s x 10⁻³ = 1 l/s

Size

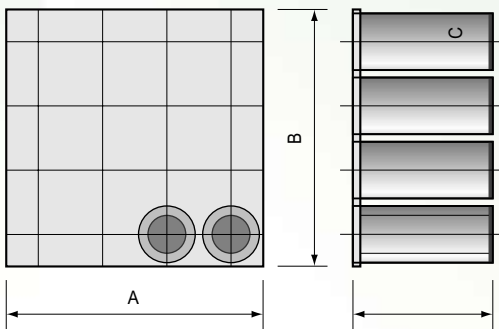

Technomart

Kamrabad, Fullorhat (Near Fullorhat Yuba Sangha), Sonarpur, Kolkata - 700 150, W.B., India
 Tel : +91 9830156166 / 9230556166 / 9230518809 Fax : +91 33 2434 6692
 e-mail : technomart@vsnl.net, Web : www.techno-filter.com